

# eSG40 Electronic Straight Gate



The StraightGate40 from Turbosmart is the smallest butterfly style external wastegate for tight engine bay confines and fitment. The StraightGate40 is a zero-offset butterfly style wastegate which allows enormous flow and almost linear control with unparalleled boost control throughout the entire operating range.

- Liquid cooling provision
- Strap type V-band clamps
- User adjustable actuator position
- Full Electronic control
- Endless Boost Control Strategies

### Mechanical Data

Flow Diameter	40mm (1.57in)
Mass	1816g
Safe working pressure max.	220 psig / 1520 kPa / 15 bar
Actuator life	550k cycles @ 150°C (302 °F) ambient 800k cycles @ 80°C (176 °F) ambient
Port fittings type	Liquid Cooling: 2x 1/8" NPT

### Thermal Data

Max. thermal stress (non-cooled)*	>45min @ 800°C EGT continuous
Max. thermal stress (h2O cooled)*	>24hr @ 800°C EGT continuous
Max. ambient/compartement temp.	200°C / 392°F
Max. actuator temp.	150 °C / 257°F

### Electrical Data

Sensor Operating voltage	5V±0.5V
Outputs	<ul style="list-style-type: none"> <li>• Analog 0-5V</li> <li>• Pulse Width Modulated signal</li> </ul>
Operating Temperature	-40 °C to 150 °C (-40 °F to 302 °F)
Sensor Supply Current	21mA
PWM Frequency Output	220-268 Hz

### Temp Sensor Data

Accuracy	±2.7°C
Voltage offset at 0°C	2630mV
Gain	-13.6mV/ °C
<b>Deg C (Deg F)</b>	<b>Temp Sensor Output (mV)</b>
0 °C (32 °F)	2630
150 °C (302 °F)	538


### Position Sensor Data

Position	Target Voltage (V)	Duty Cycle
100%	0.20-0.60V	~16%
0%	4.40-4.80V	~84%

### Connection Data

Red 22AWG	5V
Black 22AWG	0V
White 22AWG	Valve Position
Blue 22AWG	*Unfiltered Signal (Position Output)
Yellow 22AWG	Sensor Temperature
Red 14AWG	Motor A (Positive Closed)
Black 14AWG	Motor B (Positive Open)

**\*Note: The Blue (unfiltered position signal) is not required for use & is for development purposes only.**

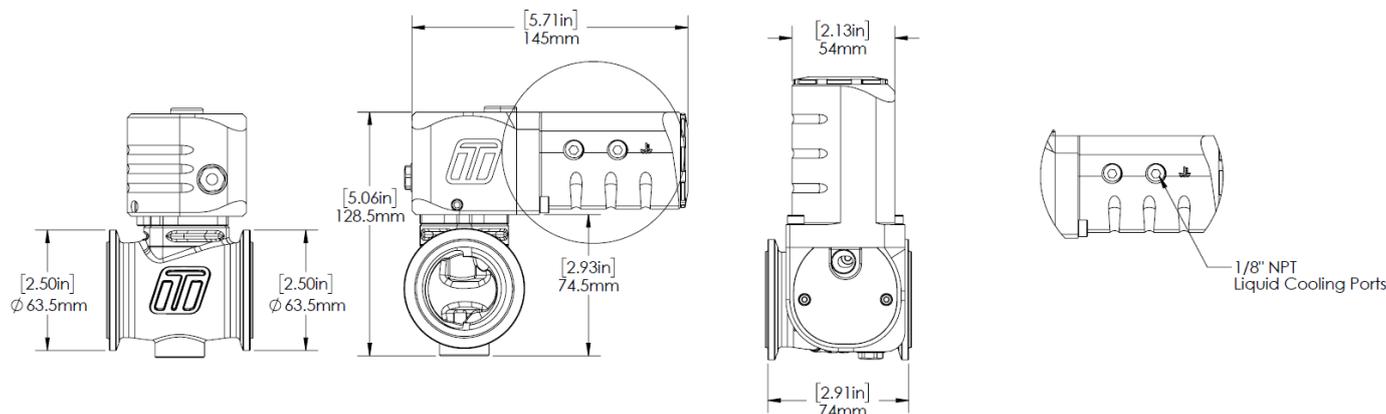

\*Continual source of minimum 1250°C exhaust gas, with no cool down periods for at least 30minutes and no external air cooling on actuator, this is a destructive test that an ICE engine cannot support. Contact tech support for further information.

### Material Data

Beryllium (Be)	0%
Main Body	High temp 347 SS
Actuator housing	6262 T6 anodised Al.
Butterfly Shaft	630ss
Butterfly Valve	630ss
V-Band	Heat treated 431 SS w/ 18-8 nut
Weld Flanges	304 Stainless Steel

### Motor Data


Wire Size	14AWG
Direction	Red wire positive closed
Stall Current**	60A
Hold Current	0A (Short motor wire for braking)
Max Force @stall	4085N
Max Force @power	2042N
Speed (Opening)	750%/s (130ms)

### Water Cooling

Temperature Range	-40 to 120degC / -40 to 248degF
Pressure Range	0 to 100psi / 0 to 689kPa / 0 to 6.9 Bar
Coolant Safe	Yes

### Included in the Box


- Wastegate unit
- Outlet V-Band
- Outlet V-Band
- Outlet SS304 weld flange
- Outlet SS304 weld flange
- Sticker
- Instruction card

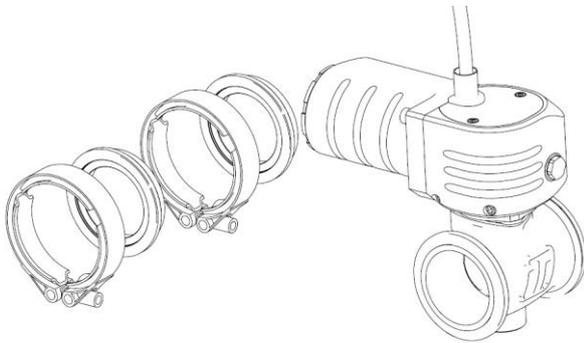

### Flow Characteristics

Max. Flow	223.7 CFM/6.34 m3/min @1psidP
Flow	-2.6% of full lift (BFSL)
Linearity	

#### Flow Linearity

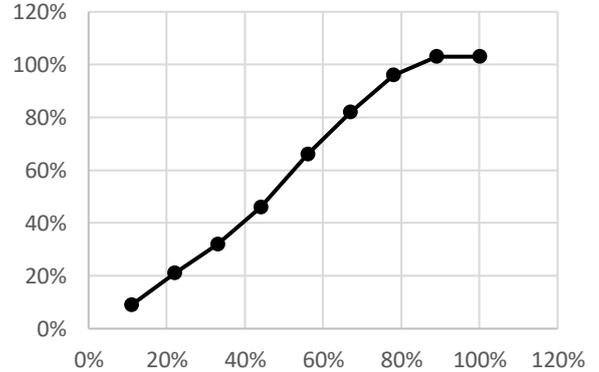

### Order Data

TS-0563-1002	eSG40 Electronic Straight Gate
--------------	--------------------------------

### Accessories

TS-0504-3001	WG45 Stainless Outlet Weld Flange
TS-0553-3003	WG45 Outlet V-Band
TS-0504-3007	WG45 Alloy Inlet Weld Flange
TS-0550-3124	Electronic Straight Gate Motor Replacement
TS-0550-3123	eStraight Gate Replacement Sensor

*Refer to catalogue for further accessories*

### Install Req.

Inlet Pipe	Suits 47.63mm/1.875" OD
Outlet Pipe	Suits 47.63mm/1.875" OD
Water Port Tube Min. ID	6mm / 0.236" (Recommended -4 AN Fitting)

\*\* High amperage for prolonged periods will damage the motor, keep high Amperage operation to short bursts.